




HE8/127 >>> HOW TO ORDER

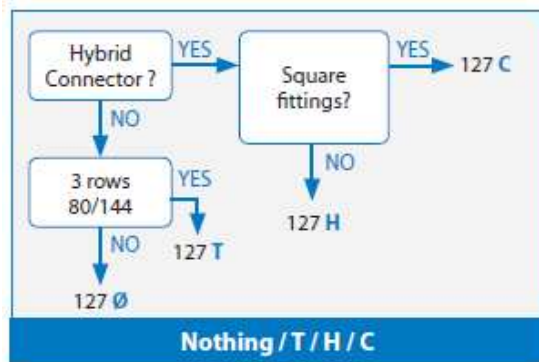


Reference	Codable	Lockable
Fittings for receptacle (X: No fittings)		
K / A / P / B / KE / AE / L	Yes	No
S / D / SC / DC	No	Yes
KD / AD / KED / AED / KT / AT / KET / AET	Yes	Yes
Fittings for plug (XL: No fittings)		
A / J / H / N / V / E / R	Yes	No
PA / PC / T	No	No
D / S / NF / EF / RF	No	Yes
AS / JS / NS / ES / RS / ET / RT	Yes	Yes

Fittings (see pages 106 to 113)

Socket	PIN	Description
YC		Right angle PC tail
YL		Long right angle PC tail
T		SMT with metallized terminals
U		SMT double sided
Y		Straight PC tail
YD		Straight PC tail (for HE804 connector only)
W3		Wire wrap connections
Z	ZC	Solder on wire
X1**	X**	Crimping tail
ØØ	ØØ	No signal contacts (HE807)

Signal contacts (see pages 102 to 105)

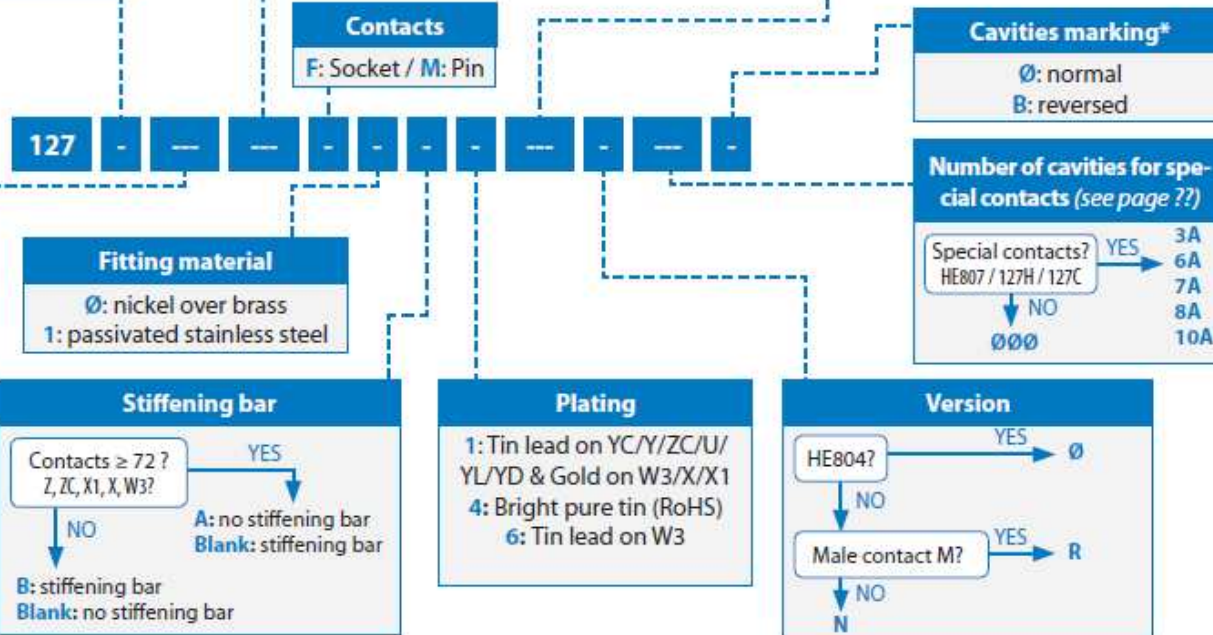

Number of signal contacts		
127 H or 127 C	0 5 48 56 60	17 29 41 53
127 Ø	33 65 96	72 84
127 T 3 rows	80 144	

* Asymmetrical arrangements with female contacts always have plug marking. Asymmetrical arrangements with male contacts always have receptacle marking.
 ** Not available for HE801 and HE807 connectors.



Download our HE8/127 catalogue with all the technical datas on our dedicated website:
www.pcb-interconnect.com